


Thanks for buying the Texel bench.

In this manual we explain step by step how to assemble the bench.

Inside one of the two packages there is a hollow space where you will find the phillips heads. This is to make sure you don't hurt yourself while accepting the packages.

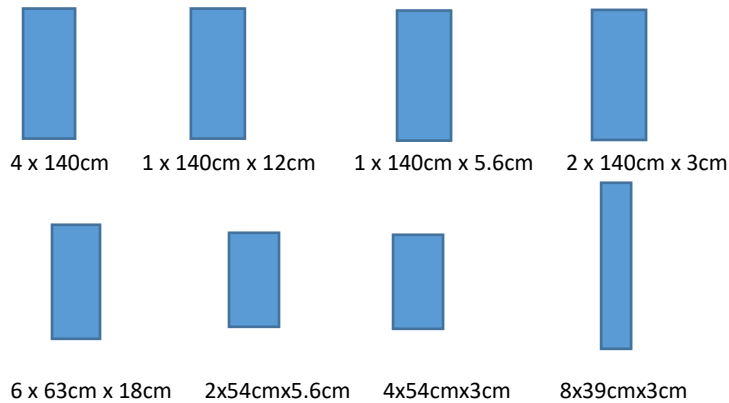

What do you need?

- Power tool
- A drill (we advise drill size 4)
- Phillips head
- Tape measure

Step 1: Sandpaper


Sandpaper all the planks on both sides.

Step 2: The side panels

You need the following planks / slats:

- 6 x 63x18cm
- 4 x 54x2.7cm
- 2 x 54x6cm

Your going to assemble the side panels. Laydown 3 planks (63x18cm) next to eachother. Place 2 slats (54x2.7cm) on the top and downside of the planks. Drill in holes and mount them with the screws. Take a plank (54x6cm). Mount these on both sides on the slats you just assembled. Repeat this procedure for a second side panel.

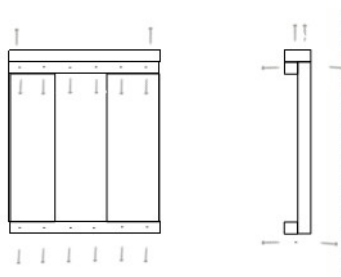

Step 3: The seating

You need the following planks/:


2x 140x18cm

1x 140x5.6cm

4x 39x2.7cm

Laydown 2 planks (140cm x 18 cm) and 1 plank (140cm x 5.6 cm) next to eachother. Do this with the largest plank on the outside. Drill holes in the planks and laydown the seating between the side panels. Laydown a beam (39cmx3cm) on one side under the fist plank of the seating. Laydown one slat (39x2.7cm) in the middle. Mount the beam. This is a support beam.

Now take 2 slats (39x2.7cm) and place them on the side panels. Mount these with 6 screws trough the seating, make sure the are well placed in the beams. Now assemble the beams on the side panels, use 4 screws. No drill a hole on the left, a hole in the middel and a hole on the right in the plank with size 140x2.7cm en assemble this on the plank on the outside.

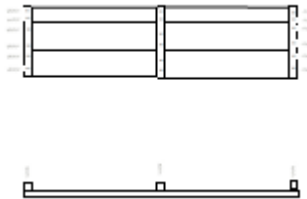

Step 4: The backpiece

You need the following planks/slats:

2x(140cmx18cm)

3x(39cmx2.7cm)


2x(140x3cm)

Place 2 planks (140x18cm) on top of eachother. Assemble 3 slats (39x2.7cm) as showed in the picture.

Drill 4 holes on the topside of the slat. Repeat this with the remaining slats. To assemble the backpiece to the seating, you have to drill 3 holes on the inside of the slats left- and rightside (these 3 holes are not shown on the picture).

You need this to assemble the backpiece to the seating. Assemble slat 1 (140x3cm) in

Make sure the screws don't hit eachother!

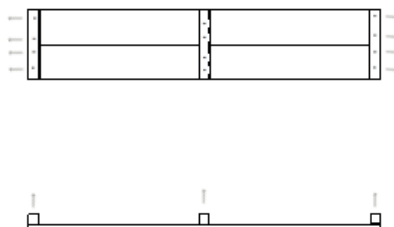

Make sure when you assemble the backpiece that the depth of the seating is 44cm. Mount the backpiece with 3 screws on both sides of the backpiece.
You just finished the Texel bench!

